

Statement of Work

Future Lab Renovation – USCGC HEALY

November 30, 2011


In Jan - Apr 2012, STARC would like to renovate the Future Lab on Healy in the following manner:

1. Remove the two 19" racks located in the middle of the lab, forward bulkhead.
The only equipment needed that is currently in the racks is one fiber patch panel. That fiber patch panel would be mounted to the bulkhead in the same location of the racks (after the racks are removed).
The removal of the 19" racks would be done by certified welders (subcontractor) involved in the Computer Lab renovation. The supporting angle iron underneath the racks would be cut off flush with the deck and any floor tile repairs made as required.
2. Lower all the tall benches in the back of the lab to normal desk height and fabricate one continuous bench the length of the forward bulkhead (at desk height).
3. Raise the desk height bench as you enter the Future Lab and move the internet terminals to the new taller bench.

Attached is a drawing of the new proposed Future Lab.




Current Future Lab

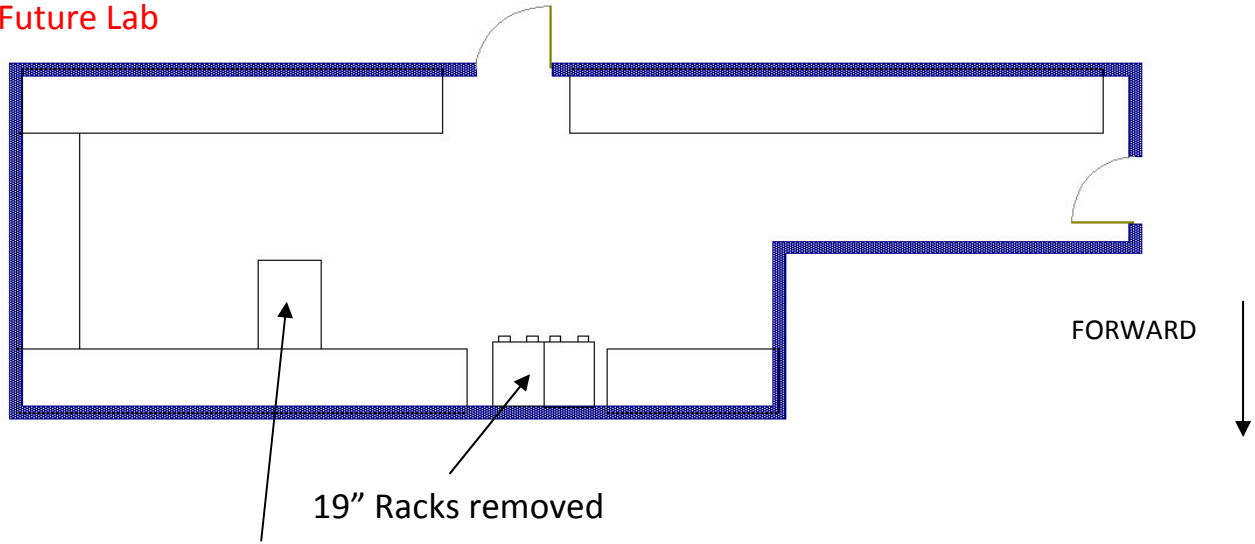

Small bench removed

New future Lab

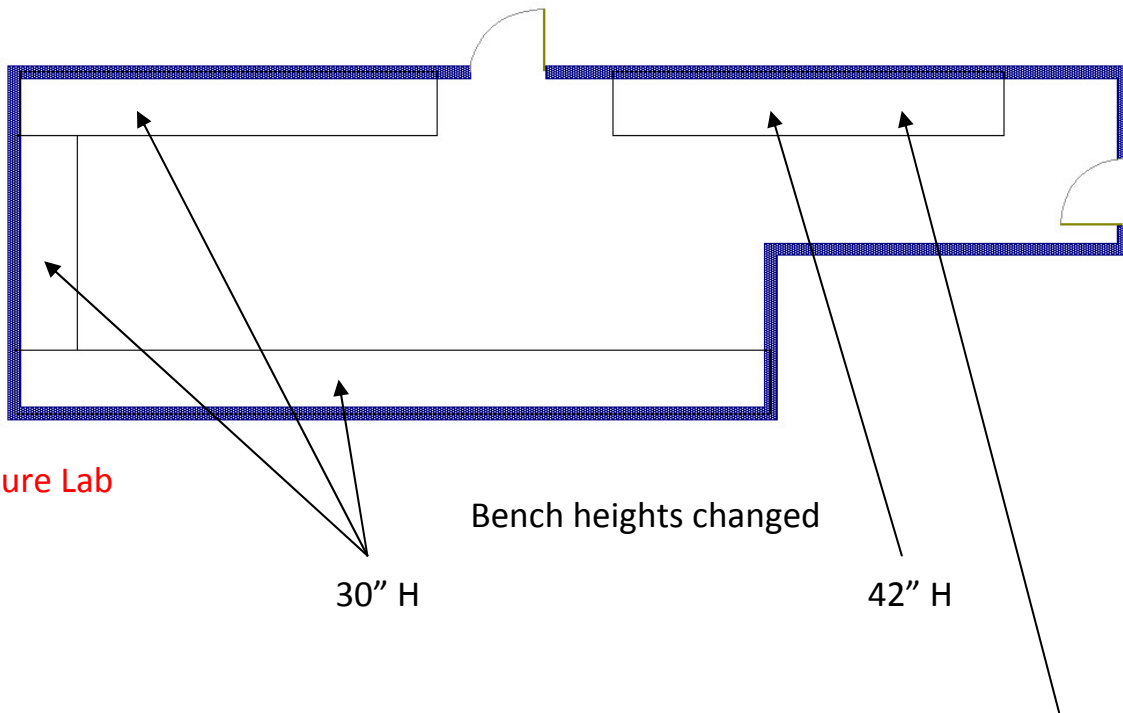

Bench heights changed

30" H

42" H

Workstation/Internet terminals would be moved to the taller bench